

NOTES:

1. MATERIALS

1.1 CABLE: AWG30 PIMF * 2P (SS) + AWG30 * 1P (HS) + 2C AWG20 (POWER)
 DETAIL: (7/0.10BC*1P+7/0.10BC+FAM)*2PCS+7/0.32BC*2C+7/0.10BC*1P+
 AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET;
 OD: 5.5 ± 0.15MM

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE

1.2 P1: USB3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

1.3 P2: USB3.0 B TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION, GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

1.4 ALL HOOD: MOLDED BLACK PVC.

2. ELECTRICAL



100% OPEN AND SHORT TEST.

3. PACKING: 1PC/PE BAG.

4. ALL MATERIAL BE ROHS COMPLIANT.



PINOUT

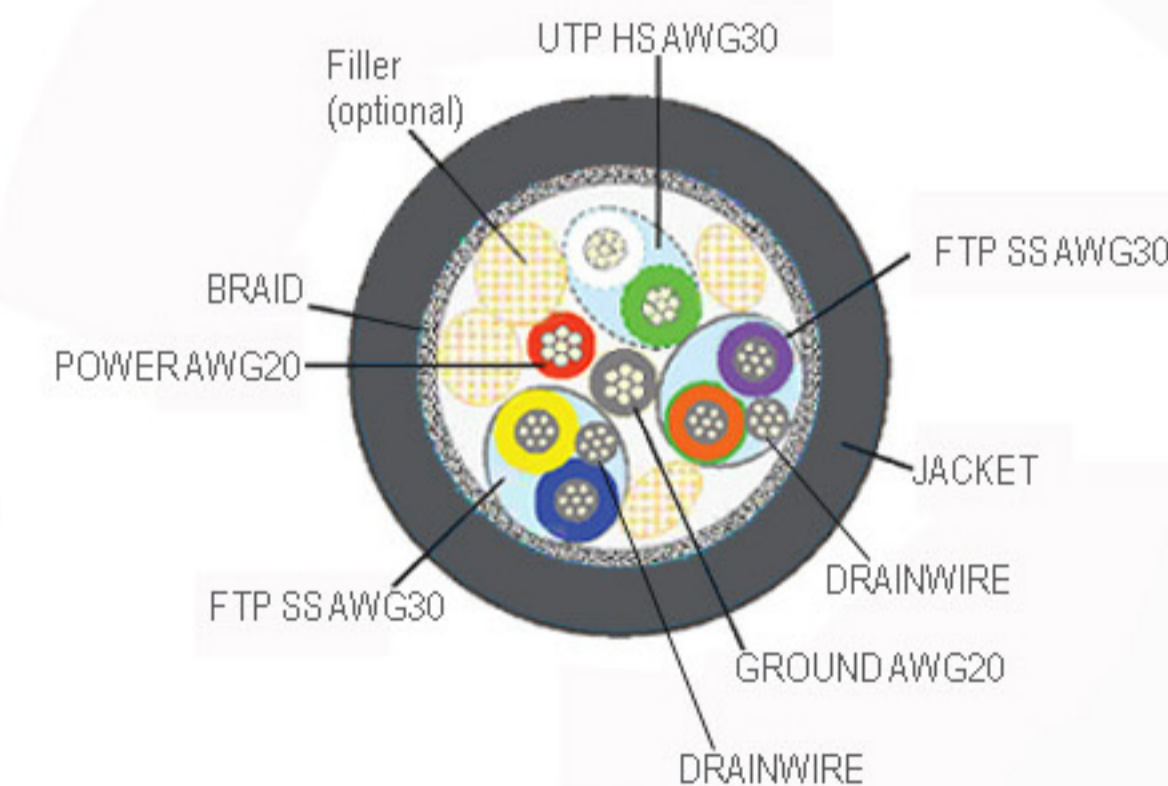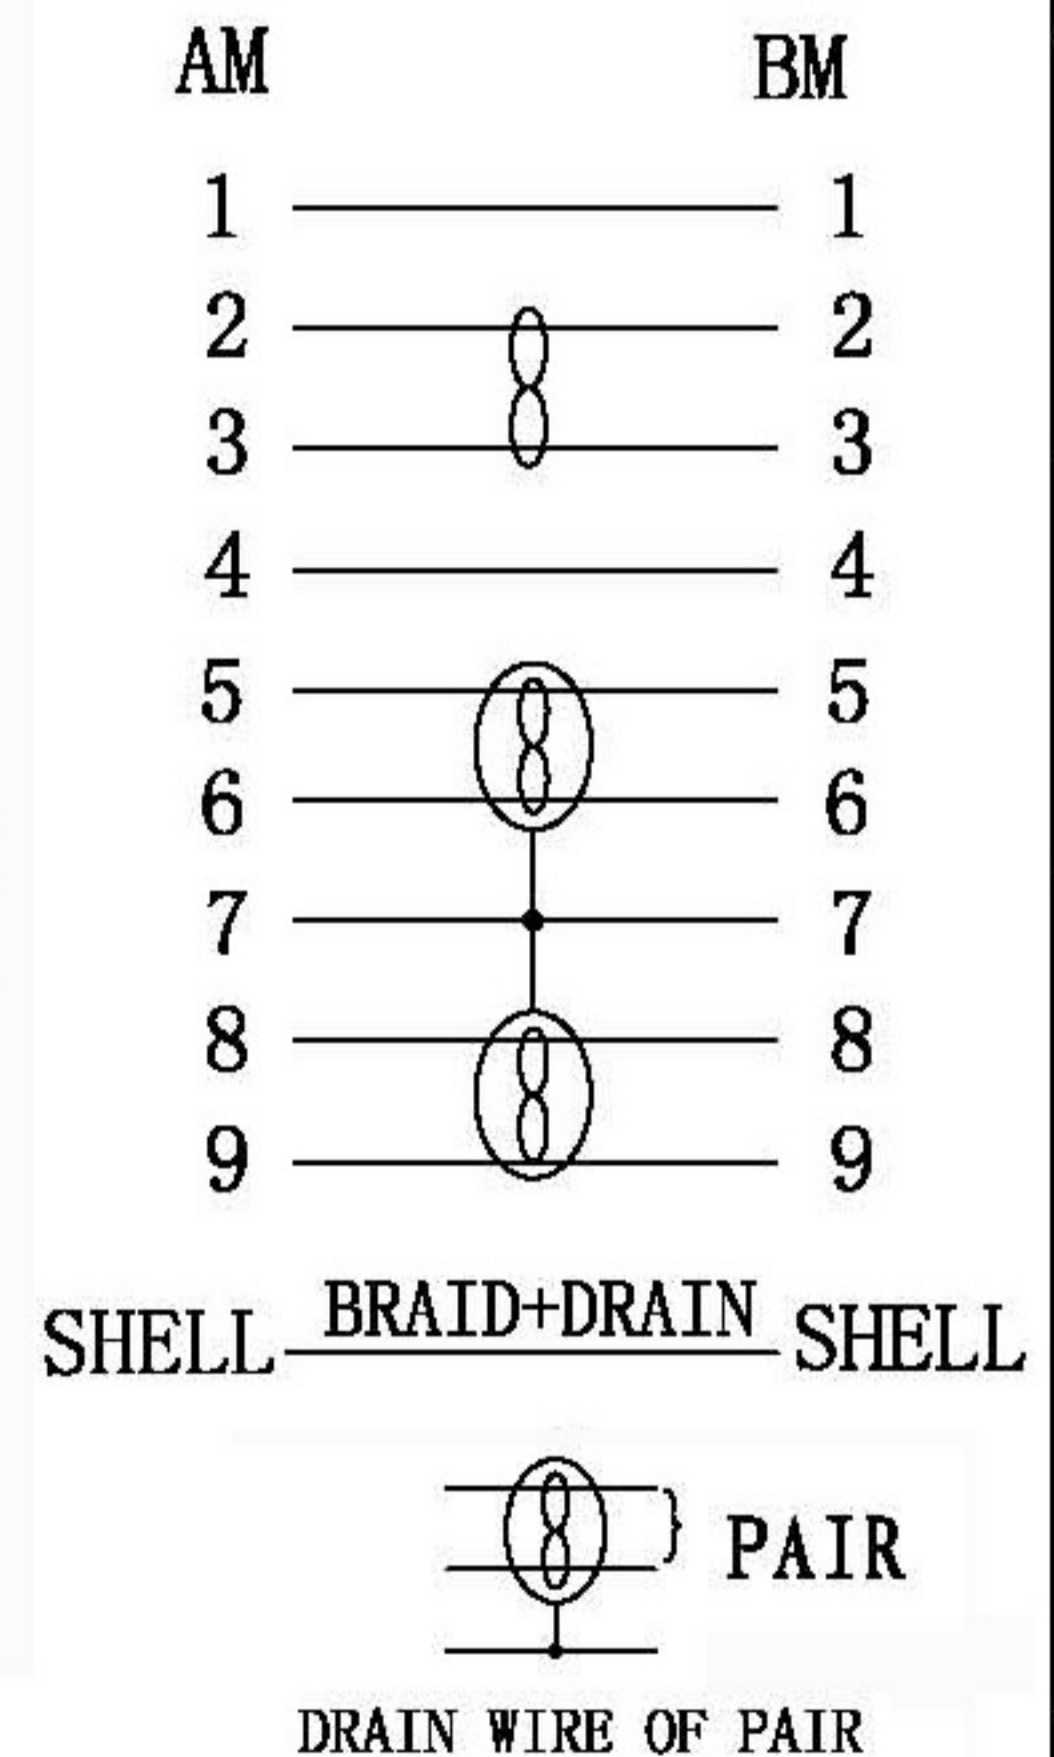

P/N

NUMBER	L
K5236.1	1000 ± 30MM
K5236.1, 8	1800 ± 50MM
K5236.3	3000 ± 70MM
K5236.5	5000 ± 70MM

LENGTH TOLERANCE: X. ± 0.5 .X ± 0.2 .XX ± 0.1	SCALE: FREE	CUS. NAME: EFB
ANGLE TOLERANCE: X° ± 3° .X° ± 1°	UNIT: mm	
	VERSION: 01	
	PAGE: 1/1	

USB3.0 SUPER SPEED PREMIUM CABLE	
PRODUCT NO: P/N	CUSTOMER NO:
DRAWING NO: 0661	PRODUCT DESCRIPTION: USB 3.0 AM/BM



00	NEW ISSUE	2013-04-12
REV.	MODIFY DESCRIPTION	DATE